



### Polyphase short-circuiting device for LV OHL lines with twisted conductors

SR EN 61230



Code: Msp - T - 1 - nxS<sub>r</sub>/0,7 - S<sub>p</sub>/I<sub>p</sub> - F/p

**Intended purpose:** earthing and short-circuiting of twisted conductors of LV OHL lines.

**Application:** from height (from the ladder, from the basket) - by direct connection (or by means of adapters) of the short-circuiting device subassembly plugs to the sockets of the voltage connectors mounted permanently on overhead conductors.


**Components:**

- The short-circuiting subassembly consisting of:
  - Coupling plug for voltage connectors type COT 10-95 A – „n” = 4...7 pieces
  - Short-circuiting cable – 3...6 pieces
  - Connecting cable to the earthing subassembly - 1 piece

**!The earthing subassembly consisting of:**

- Plug for connection to the short-circuiting subassembly - 1 piece
- Earthing cable - 1 piece
- Manual earthing clamp - 1 piece
- Mobile earthing electrode (peg) - 1 piece
- Set of coupling adapters to DPS\* connectors (see NOTE) - “n” - 4...7 pieces

**Packing:** waterproof bag.

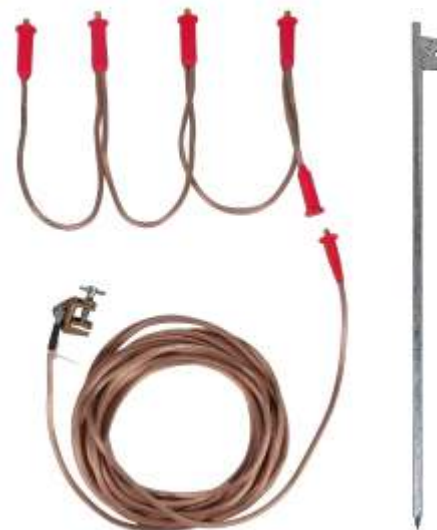

COUPLING PLUG FOR VOLTAGE CONNECTORS TYPE COT 10-95 A



ADAPTER SET

#### Technical characteristics

Rated operating voltage U <sub>n</sub> (kV)	max. 1		
Phase S <sub>r</sub> and earthing S <sub>p</sub> cable cross-section (mm <sup>2</sup> )	16	25	35
Nominal short-circuit current for t = 1 s I <sub>sc</sub> (kA)*	4	6	8
Shock (peak) nominal current for t = 0,02 s I <sub>sd</sub> (kA)	8	12	16
Test short-circuit current for t = 1 s (kA)	4,6	6,9	9,2
Shock (peak) current for t = 0,02 s (kA)	9,2	13,8	18,4
Power factor (according to SR EN 61230)	2		
Phase cable I <sub>r</sub> length I <sub>r</sub> (m)	max. 1		
Earthing cable I <sub>p</sub> length (m)	max. 15		
Number of coupling plugs to twisted conductors	max. 7		

\* NOTE = for DPS connectors, adapters provide nominal short-circuit current for t=1 s - max. 6 kA

### Four-phase short-circuiting device for piercing clamps - Enel SCC 0138 RO

Code: WBT 127

**Intended purpose:** earthing and short-circuiting of low-voltage electrical cables next to the fixed points, by means of insulation piercing clamps.

**Application:** manual, by the insertion of tweezer-type phase clamps in the piercing clamp sockets.

**Components:**

- Short-circuiting subassembly consisting of:
  - Tweezer-type phase clamp – 4 pieces
  - Short-circuiting cable – 2 pieces
  - Central socket - 1 piece

**!Earthing subassembly consisting of:**

- Tweezer type phase clamp – 1 piece
- Earthing cable - 1 piece
- Manual earthing clamp - 1 piece

**Packing:** plastic box.

SR EN 61230



TWEezer-TYPE PHASE CLAMP

#### Technical characteristics

Rated voltage of the network U <sub>n</sub> (kV)	max. 1	
Phase S <sub>r</sub> and earthing S <sub>p</sub> cable cross-section (mm <sup>2</sup> )	16	
Nominal short-circuit current for t = 0,2 s I <sub>sc</sub> (kA)	8	
Shock (peak) nominal current for t = 0,02 s I <sub>sd</sub> (kA)	16	