



Safety harness with 7 anchoring points - P-80 type

EN 361

EN 358



Code: P-80

P-80E

P-80E ISOL

The safety harnesses, P-80 type, are made in three types:

- P-80 - standard model,
- P-80E - "elastic webbing" and
- P-80E-ISOL - "elastic webbing" + "isolated".

The P-80 safety harnesses have 7 attaching points:

- a dorsal anchoring point (a metallic ring)
- two frontal anchoring loops (made of straps) that form a frontal anchoring point
- two lateral attaching points fixed on the work positioning belt
- two special loops for working in sitting position, positioned on the frontal straps


The P-80 safety harnesses are provided with a lumbar and back protector and a harness with an adjustment systems for the leg straps (thighs) and the chest straps - shoulders and protections for the thighs in order to comfortably work in sitting position.

All the P-80 safety harnesses are supplied with automatic snap buckles. The frontal anchoring loops are provided with shock markers.

All the P-80E and P-80E ISOL type harnesses have the straps for the upper part, in the shoulders area, made of an elastic material in order to be more comfortable.

The P-80E ISOL safety harness is provided with insulating protective material on all the metallic elements (buckles and side rings).

METHODS OF USE:

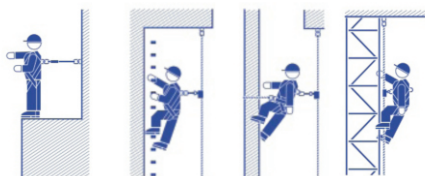


IZOLATĂ



P-80




P-80E

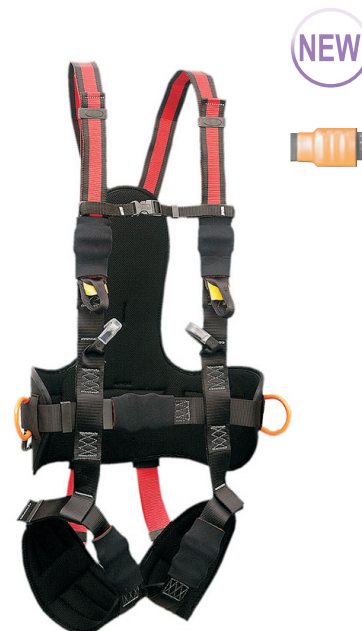

P-80E ISOL

AUTOMATIC SNAP BUCKLES



LATERAL ANCHORING RING



METALLIC

ISOLATED