



Work positioning device with length adjustment device - PROT 11 type D=12 mm

EN 358




Code: PROT 11 - ref: AF - 101 xx (xx - length)

The work positioning devices PROT 11 are made of white polyamide rope, with diameter of 12 mm and are provided at one end with a thimble, with protective sleeve and a length adjustment device (Manustop type).

They can be delivered with or without connection elements (snap hooks).

| Code | Diameter rope (mm) | Length (m) |
|-----------|--------------------|------------|
| AF 101 02 | 12 | 2,0 |
| AF 101 03 | 12 | 3,0 |

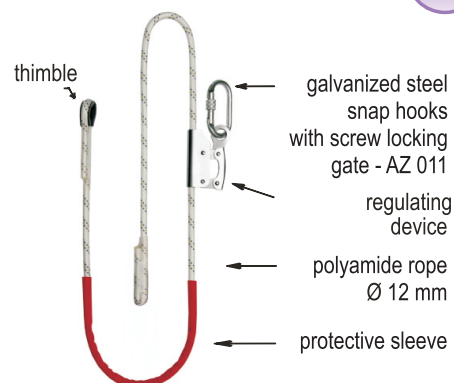

Work positioning device with length adjustment device - PROT 3 type D=14 mm

EN 358




Code: PROT 3 - ref: AF - 130 xx (xx - length)

The work positioning devices PROT 3 are made of white polyamide rope, with diameter of 14 mm and are provided at one end with a thimble, with protective sleeve and a length adjustment device (Manustop type).

They can be delivered with or without connection elements (snap hooks).

| Code | Diameter rope (mm) | Length (m) |
|-----------|--------------------|------------|
| AF 130 02 | 14 | 2,0 |
| AF 130 03 | 14 | 3,0 |

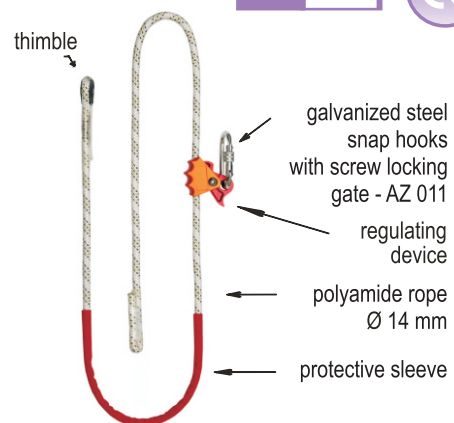

Flexible anchoring support

EN 353-2




Code: AC 200 xx (for ø 12 mm) ; xx - support length (m)

Code: AC 100 xx (for ø 14 mm) ; xx - support length (m)

The flexible anchoring support is made of polyamide rope, white color, with diameter of 12 or 14 mm. The flexible anchoring support is provided with thimbles at both ends, protected against erosion with plastic.

The length of the flexible anchoring support is variable, depending on the client's request (10 m, 12 m, 15 m, 20 m, etc.).

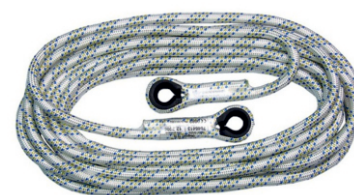

Energy absorber - ABM type

EN 355



Code: ABM

The ABM energy absorber is made of polyamide webbing covered with a transparent plastic cover. The ABM energy absorber can be delivered individually or fixed on a fall arrester.

Dimensions: 160 x 35 x 45 mm

Material: Polyamide 100%

Weight: 0,160 kg

