Mobile anchoring beam (for work on building facades)

EN 795 class B

Code: see table

Mobile anchoring beams type AT 060 and AT 061 can be used as portable anchoring points, by their fastening in the door and window frame.

These beams are provided with two fastening plates that must be positioned to provide the firm fastening of the device in the door / window frame.


These beams are recommended to be used by the workers of air conditioning installation companies, by utility climbers working on the building facade, etc.


The mobile anchoring beams are designed to provide safe operating conditions for a **single person** equipped appropriately with personal protective equipment against falling from height.



Code	AT 060	AT 061
Housing material	Galvanised steel	Aluminum
Dimensions (mm)	1.415 x 150 x 100	1.455 x 122 x 100
Door / window frame opening (mm)	350 ÷ 1.240	300 ÷ 1.280
Anchoring points	1	1
Weight (kg)	6,9	3,2

AT 060

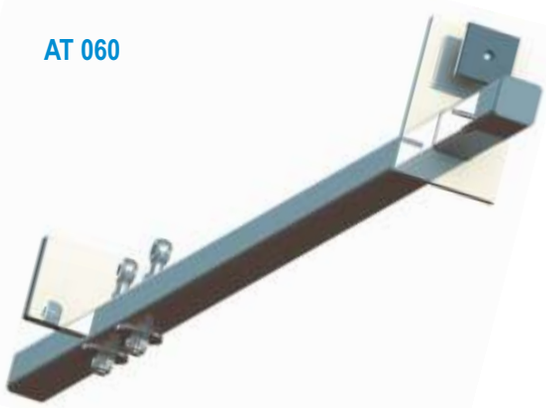

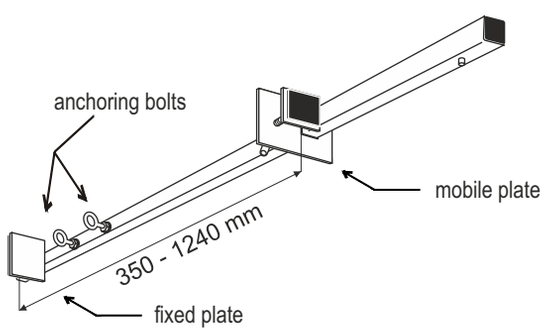

AT 061



