



## Rechargeable LED handheld flashlight - FlashLED type

**Code: FlashLED**

**EA 0143**



The FlashLED accumulator flashlight provides users with improved lighting conditions of the work area for works performed in night or poor lighting conditions.

The FlashLED accumulator flashlight is portable and has an adjustable head, LED lighting, very versatile and easy to handle.

### Lighting mode:

- ✓ long distance - concentrated beam - LED 3 x 10°
- ✓ short distance (work light) - diffuse beam - LED 2 x 38°
- ✓ complete lighting - LED 3 x 10° + LED 2 x 38°

The flashlight is provided with LEDs to indicate the charging level, charging status and operating function in emergency situations (with the flashlight in the charging support, in case there is a lack of power during the charging).

### The flashlight characteristics are:

- Emergency operation
- Save function for the last setting
- Intermittent lighting function and Morse lighting


The flashlight is provided with a swivelling head which allows the axis to be amended on the horizontal plan, in a field of 0 - 50°. The flashlight is provided with 3 coloured filters (red, green, yellow) to provide signalling in the work area and a shoulder belt for transportation.

### The accessories of the FlashLED accumulator flashlight are:

- Charging support with wall attachment possibility
- 230 V AC charging cable
- 12 - 24 V DC charging cable (at car power outlet)
- shoulder belt
- filter set (green, yellow, red) - optional



### Lighting versions:

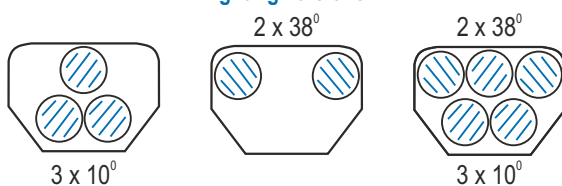

**FILTER SET**



**CHARGER SUPPORT + CHARGING CABLE 230 V AC**



**CAR CHARGING CABLE**



**SHOULDER BELT**

### Technical characteristics

Li-Ion accumulator	7,2 V / 4400 mAh
LED type	5 x 3 W, PowerLED, white color
LED with focus generated by the beam at 10°	3
LED with focus generated by the beam at 38°	2
Autonomy in the lighting version:	
- long distance - focussed beam LED 3 x 10° (h)	9
- short distance - diffuse beam LED 2 x 38° (h)	7
- complete lighting - LED 3 x 10° + LED 2 x 38° (h)	4
Operating temperature range (°C)	-20 ... + 45
Maximum power (W)	15
Charging time (h)	5
Supply adaptor (V AC)	230
Supply (V CC)	12-24
Flashlight housing protection degree	IP 65
Charger housing protection degree	IP 54
Flashlight + charger weight (kg)	1,12 + 0,43
Overall dimensions without charger (mm) L x l x h	260 x 125 x 92,5
Overall dimensions with charger (mm) L x l x h	332 x 149 x 106