



LADDERS

Aluminium extensible KRAUSE ladder - 2 sections


EN 131

Code: see table

Extensible KRAUSE ladders can be extended depending on the height where the work is performed and can be used in the following working versions:

- ▶ leaned, in retracted version
- ▶ leaned, in extended version

At the end of the base section, ladders are provided with anti-slip covers to provide better adherence to smooth surfaces and to prevent the accidental slip of the ladder.

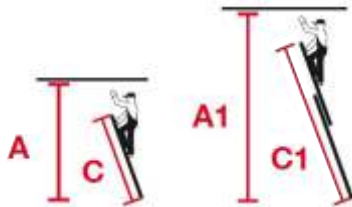

| Technical characteristics | Fabilo | | | | Corda | | | |
|-----------------------------------|--------------|---------------|---------------|---------------|--------------|---------------|---------------|---------------|
| Ladder code | 120540 | 120557 | 120564 | 121394 | 032089 | 032119 | 030511 | 031525 |
| Number of sections x rungs | 2 x 9 | 2 x 12 | 2 x 15 | 2 x 18 | 2 x 8 | 2 x 11 | 2 x 14 | 2 x 16 |
| Working height A (m) | 3,90 | 4,70 | 5,50 | 6,35 | 3,50 | 4,30 | 5,10 | 5,65 |
| Working height A1 (m) | 5,50 | 7,15 | 8,75 | 10,10 | 5,10 | 6,45 | 8,10 | 8,90 |
| Retracted length C (m) | 2,70 | 3,55 | 4,40 | 5,20 | 2,25 | 3,10 | 3,90 | 4,50 |
| Extended length C1 (m) | 4,40 | 6,05 | 7,75 | 9,15 | 3,90 | 5,30 | 7,00 | 7,85 |
| Weight (kg) | 9,6 | 13,5 | 19,2 | 25,5 | 7,8 | 10,5 | 17,5 | 19,5 |

Extensible IRMUT ladder, with GRP sections - 2, 3 or 4 sections

EN 131

Code: see table

Extensible IRMUT ladders with two, three or four sections have their rails made of glass reinforced polyester resin (GRP) and aluminium rungs; they can be configured depending on the height of the work and can be used in the following working versions:

- ▶ leaned, in retracted version
- ▶ leaned, in extended version

Rungs and their fixing systems on rails are made of aluminium alloy. Rungs and rails are connected by riveted flanges that guarantee excellent tightening and optimal anti-roll rigidity of the rungs, and in case of damages they are easily replaceable.

At the upper end, each section is provided with a support and sliding system on flat surfaces, consisting of one pair of rollers each. Sections can be separated one from another.

The base section is provided with **2 anti-slip soles** and **one detachable leg, with hinged anti-slip sole and height adjustment**, which can be mounted in one of the two rails.

Upper sections are provided with rubber plugs to prevent the ladder slip on smooth surfaces when used individually.

Due to the insulating rails, ladders are recommended for works in electrical installations.

Extensible IRMUT ladders can be delivered with the following optional **accessories**:

- **Support, rolling and fastening device on the pole**, with textile strap
- **Telescopic anti-flexion device**, to limit the bending
- **Extension hook**, for handling the upper sections from the ground

